aska®

LUMAPHORE - LED 400XL

LED 400XL

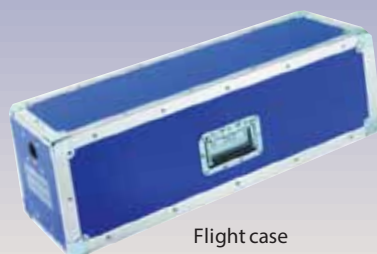**48 200 LUMEN** | **IP 65** | < 6 | IK10 | 2mn | FABRIQUÉ EN FRANCE

The **LUMAPHORE® 400XL** is the most adaptable of the LUMAPHORE® LED range. Four high-power COB LEDs in a translucent polycarbonate casing give increased ground level illumination. It has IK10 protection, and is available with IP65 rated enclosure. The LUMAPHORE® LED 400XL emits more than 48,000 Lumens from less than 400 W. It is excellent for :

» Road marking operations
» Road surfacing operations
» Emergency services

» Civil Security
» Civil Engineering operations
» Motorway operations

Benefits of the LUMAPHORE® 400XL
» 2400 m² lighting from 385 Watts
» IP65 / IK10
» Powerful ground level lighting
» Ring of suspension
» Very light : 6.0kg
» Robust : ABS, polycarbonate casing
» Weather resistant
» Superbly versatile for use in many environments

Flight case

180/360 and/or On/Off

LUMAPHORE - LED 400XL

Technical data

Electrical Specifications

No. Of LED modules	8 + 4 COB
No. Of LEDs per module	86
Total Lighting Output	360 W
Power of electricity supply	385 W
Connecting cable 3x1.5^2 head	7 m
Average life of LEDs	50000 hrs
Immediate illumination	yes

Safety Specifications

Protection index	IP65 / IK10
Wind resistance	162 Km/h
Thermal Protection	Yes
Temperature range for use	-15°/+40°

Photometric Specifications

Area of illumination	2400 m^2
Colour temperature	4700-5000 °K
Lumens/module/COB	4060/3950
total Lumens	48280
Color rendering index	> 82

Mechanical Specifications

Diameter	22,5 cm
Length	91 cm
Weight	5,5 Kg
Optimal height for use	3 to 4 m
Average assembly time	2 min.
Tripod Stand weight (Approx.)	26 kgs

Honda Generator EU10i 1000 W

Accessories Available

Telescopic mast with or without winch
Switch 180/360 and/or ON/OFF
DS1 Socket, DIN pin
Support with 15° angle
1000 W Generator type HONDA EU10i

aska®

Aska Equipments Ltd.